



CARTRIDGE HEATER IMMERSION

3/4" Diameter
NPT Size: 3/4"
Standard Termination: 12" Leads
Maximum amperage: 15.0

1" Diameter
NPT Size: 1"
Standard Termination: 8-32 Screw and Nut (SF3)
Maximum Amperage: 25.0

Length A	Maximum Wattage in Water
4"	705
5"	915
6"	1130
7"	1340
8"	1555
9"	1765

Length A	Maximum Wattage in Water
5"	1195
6"	1495
7"	1795
8"	2095
9"	2395
10"	2695

1 1/2" Diameter
NPT Size: 1 1/4"
Standard Termination: 8-32 Screw and Nut (SF3)
Maximum Amperage: 30.0

1.9 Diameter
NPT Size: 2"
Standard Termination: 12" Leads
Maximum Amperage: 40.0

Length A	Maximum Wattage in Water
6"	1690
7"	2145
8"	2600
10"	3055
12"	3505
14"	3960


Length A	Maximum Wattage in Water
10"	4200
12"	5000
16"	6700
20"	8400
24"	10000
30"	12600

2.3" Diameter
NPT Size: 2 1/2"
Standard Termination: 12" Leads
Maximum Amperage: 50.0

*Above wattages are based on a unit operating immersed in water. For heating other materials consult a Sales Representative.
*Lengths between and longer than those listed may be ordered.

Length A	Maximum Wattage in Water
12"	6000
18"	9000
24"	12000
30"	15000
36"	18000
42"	21000

Straight thread with nut. Specify thread size and if bushing is to be standard (hex outside vessel) or inverted (hex inside vessel).

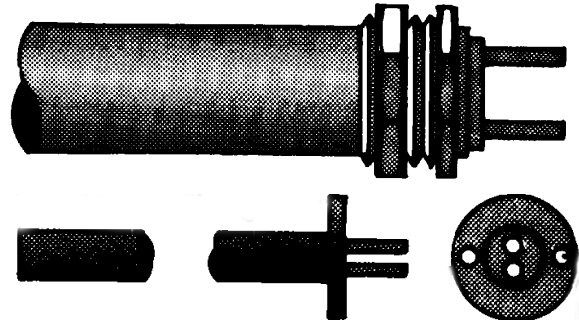

Installation Options

Stainless steel flange. Mounting hole centers for 1/4" to 5/8" diameters is 1 1/8" and for 3/4" diameter is 1 5/32". Special flange sizes available upon request.

WEST HEAT INDUSTRIES LTD

1680 Church Avenue
Winnipeg, Manitoba R2X 2W9
www.westheat.com

ELECTRICAL HEATING DIVISION

Phone: (204) 694-2129
Fax: (204) 694-2098
Fax Orders To: 1-800 358-7711