




## INFARED HEATERS

### TOTAL AREA HEAT/SPOT HEAT & SNOW & ICE CONTROL

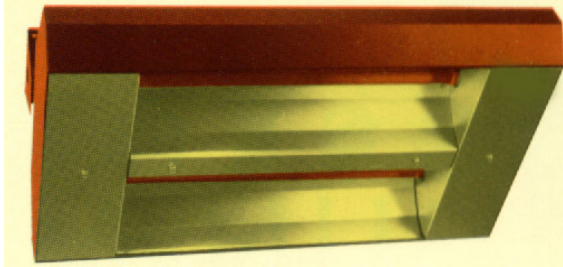

Fixture Model Series	Dimensions L x W x D	Max. UL Wattages Available Per Fix.	UL Volt. Available Per Fix.	Max. CSA Wattages Available Per Fix.	CSA Volt. Available Per Fix.	Wt. Each
222	24" L 15" W 7 1/4" D	Up to 3,200 Watts	120V 208V 240V 277V	Up to 3,200 Watts	120V 208V 240V 277V	19 lbs.
342	33" L 15" W 7 1/4" D	Up to 5,000 Watts	208V 240V 277V 480V 600V	Up to 5,000 Watts	208V 240V 277V 480V 600V	24 lbs.
462	46" L 15" W 7 1/4" D	Up to 7,300 Watts	208V 240V 277V 480V	Up to 6,000 Watts	208V 240V 277V 480V	31 lbs.

#### FEATURES:

- 30°, 60°, or 90° symmetrical and 30° offset, 30° or 60° asymmetrical heat patterns, available
- Corrosion resistant aluminized steel housing-24 ga.
- 20 ga. stainless steel housing available
- Double reflector for maximum heat pattern control
- GOLD anodized aluminum reflector and end caps
- Two elements per fixture required
- 4 high temperature lead wires for single or two -stage wiring
- Can be wired to single or three-phase systems
- 3 lengths available for a wide selection of wattages/voltages
- Dark brown baked enamel finish
- Has knockouts for 1/2" conduit on both ends and centered on top of wiring channel



**Mount Horizontally**

## WEST HEAT INDUSTRIES LTD

1680 Church Avenue  
Winnipeg, Manitoba R2X 2W9  
[www.westheat.com](http://www.westheat.com)

ELECTRICAL HEATING DIVISION

Phone: (204) 694-2129  
Fax: (204) 694-2098  
Fax Orders To: 1-800 358-7711