




CARTRIDGE HEATERS

WATT DENSITIES & SPECIFICATIONS

Diameter (Nom)	1/4	5/16	3/8	1/2	5/8	3/4	1
Diameter (Actual)	0.246	0.310	0.371	0.496	0.621	0.746	0.996
Max Length	36"	36"	72"	96"	96"	96"	96"
Max Voltage (CSA)	240V	240V	480V	480V	480V	480V	480V
Max Voltage	250V	250V	600V	600V	600V	600V	600V
Max Wattage at 240V	1200W	1300W	2000W	3000W	5300W	5300W	5300W
Wattage Tolerance	+5% -10%						
Diameter Tolerance	+/-0.002"						
Length Tolerance	+/-2% of length						
Camber Tolerance	0.010" per ft up to 12"						
	0.018" per ft above 12"						

Recommended Watt densities to heat mild steel

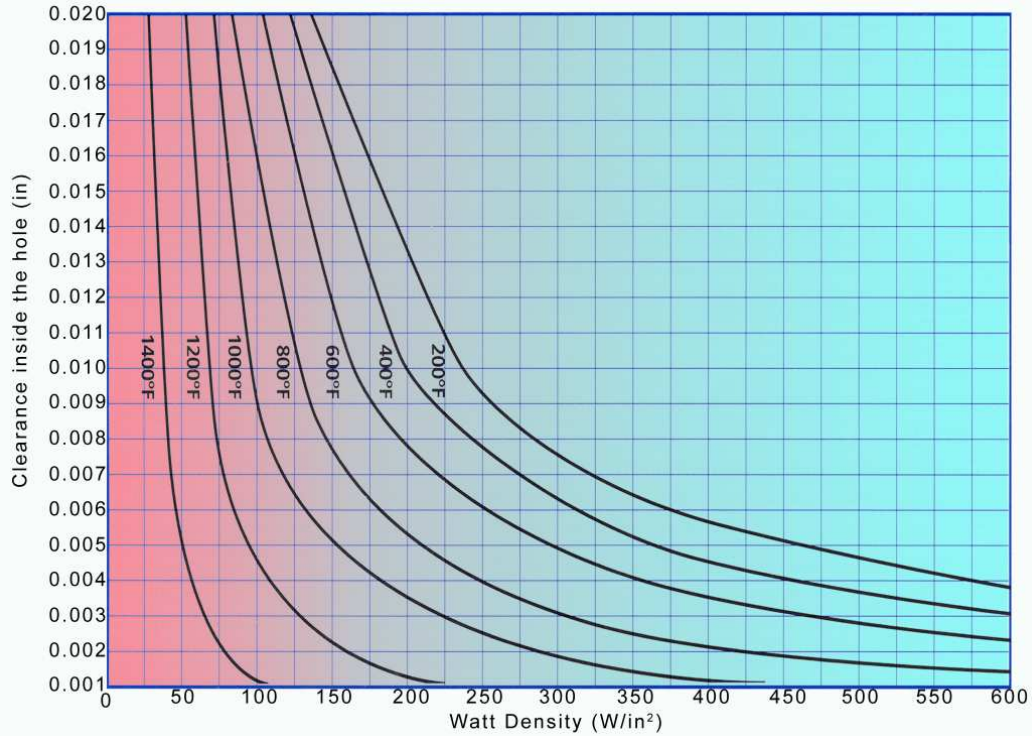

COMPLIMENTING ACCESSORIES




Thermocouples

See page 5-13

Temperature Controllers

See pages 5-1 to 5-4



High Temperature Tape

See page 6-15

Fax Orders To: 1-800 358-7711