

LOADER HOSE

Food Grade Loader Hose



- Long lasting, durable, helix reinforced PVC
- Complies with FDA requirements and 3A sanitary standards
- Convoluted cover increases flexibility
- Crystal clear wall and helix for full visual flow
- Seamless smooth bore for optimum flow

	1 1/2 ID	1 3/4 ID	2 1/4 ID
Outside Diameter	1.78"	2.093"	2.625"
Minimum Bend Radius*	3"	4"	5"
Vacuum Rating*	28 in/Hg	28 in/Hg	28 in/Hg
Weight (lbs./cu. Ft.)	40	40	55
Part Number	H-ACDR-0012-0722-0000	H-ACDR-0012-0714-0000	H-ACDR-0012-0719-0000

***at 70°F**

Static Eliminating Loader Hose

- Embedded static wire prevents employee injury and electronic damage
- Complies with FDA requirements and 3A sanitary standards
- Convoluted cover increases flexibility
- Crystal clear wall and helix for full visual flow
- Seamless smooth bore for optimum flow

	1 1/2 ID	1 3/4 ID	2" ID	2 1/4 ID
Outside Diameter	1.93"	2.09"	2.40"	2.63"
Minimum Bend Radius*	4"	4"	4"	5"
Vacuum Rating (68°F):	28 in/Hg	28 in/Hg	28 in/Hg	28 in/Hg
Vacuum Rating (104°F)	28 in/Hg	24 in/Hg	24 in/Hg	24 in/Hg
Weight (lbs./cu. Ft.)	.43	.46	.58	.64
Part Number	H-ACDR-0010-8840-0000	H-ACDR-0010-9114-0000	H-ACDR-0010-8832-0000	H-ACDR-0012-0838-0000




OEM Replacement Loader Hose

- Long lasting, durable, helix reinforced PVC
- Convoluted cover increases flexibility
- Crystal clear wall for full visual flow
- Seamless smooth bore for optimum flow

	1 1/2 ID	1 3/4 ID
Outside Diameter	1.812"	2.093"
Minimum Bend Radius*	3"	4"
Vacuum Rating*	28 in/Hg	28 in/Hg
Weight (lbs./cu. Ft.)	34	40
Part Number	H-ACDR-0012-0732-0000	H-ACDR-0012-0731-0000

***at 70°F**

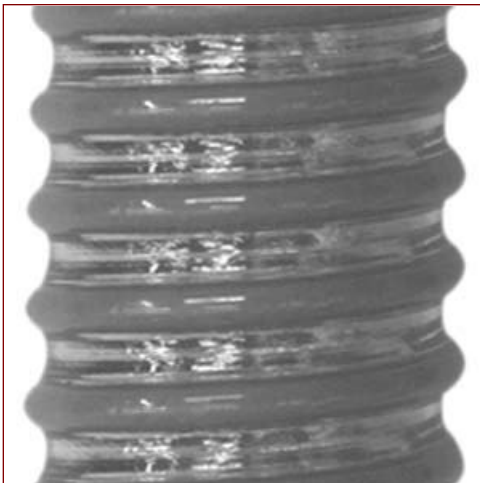

WEST HEAT INDUSTRIES LTD