

## Filter Housings & Accessories

### By-Pass Housing

The 2 1/2" x 10" By-Pass Housing is for use with smaller whole house systems or as a pre-filter. Constructed from 100% FDA Food Grade polypropylene, these housings are suited for use up to 100 psi. These Housings use the By-Pass "O" ring and have a 3/4" thread size. Uses standard 2 1/2"x10 housing wrench.

**W-FHBP-2510-030A**



### SS 1000 housing

The SS 1000 housing fits all types of candle mount filters. SS 1000 housings use the SS 1000 bracket, SS 1000 "O" ring and have a 1/4" thread

White:

**W-FHSS-2010-C2WW**

Clear:

**W-FHSS-2010-C2CW**




### "O" Ring


Made from durable silicone rubber, these "O" Rings allow for a watertight seal on your housing thus preventing leaks around the seal.



**W-ACCS-FHOR-2RFH**

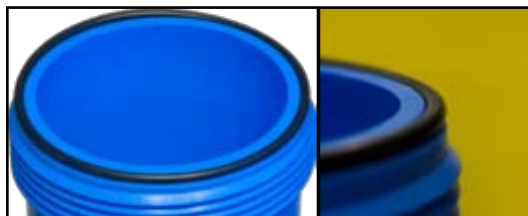

**W-ACCS-FHOR-5000**

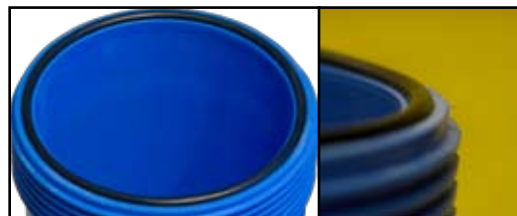

**W-ACCS-FHOR-5001**

Part #	Description
<b>W-ACCS-FHOR-4000</b>	Small "O" Ring
<b>W-ACCS-FHOR-8000</b>	Medium "O" Ring
<b>W-ACCS-FHOR-5000</b>	Large "O" Ring
<b>W-ACCS-FHOR-5001</b>	Large "O" Ring
<b>W-FHBP-2510-03GS</b>	Bypass "O" Ring
<b>W-ACCS-FHOR-1W00</b>	SS 1000 "O" Ring
<b>W-SFCT-DWF1-000R</b>	Counter Top Filter Housing "O" Ring
<b>W-ACCS-FHOR-CQ1K</b>	CQ 1000 "O" Ring
<b>W-ACCS-FHOR-2RFH</b>	Double "O" Ring Housing Gasket

## Silicone Compound

Temperature range: -40° to 400°F

Used to lubricate valves, O-rings and seals that come in contact with both hot and cold potable water.

Also ideal for lubrication and insulation of splices, electrical connectors, rubber and plastic parts.



Certified NSF 61  
www.nsf.org